



Part No.: TSHMM015MINI
Description: TruSound HDMI Lead Ultra Thin Ultra High Definition 4K x 2K (30Hz) Male to Male Black PVC 3.0m

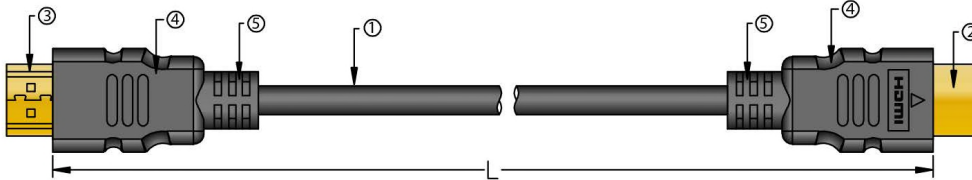

Construction

Length (L) : 3.0m ± 45mm
 Cable (1) : UL20276: (1P*34AWG+D+AFM)*5C+4C*34AWG+ADB(80/0.12ALM)
 Cable Sheath Material & Colour : PVC Black
 Overall Cable Diameter : 4.5mm ± 0.2mm
 Cable Printing : High Speed HDMI Cable with Ethernet
 E***** AWM STYLE 20276 80°C 30V VW-1
 Connector (2) : HDMI Type A Male Gold Plated Shell & Pin
 Connector (3) : HDMI Type A Male Gold Plated Shell & Pin
 Connector Body (4) : LDPE Inner Mould, PVC Outer Mould
 Strain Relief (5) : PVC

Pin Configuration

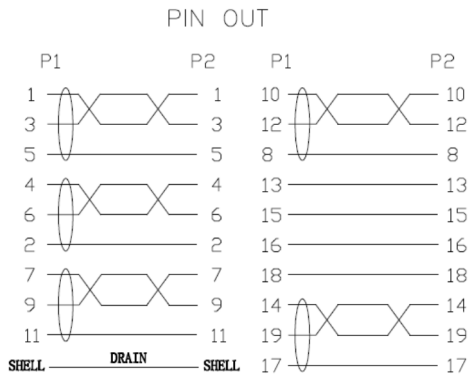

Electrical Characteristics

Conductor Resistance : 3Ω
 Min. Insulation Resistance : 10 MΩ @300V (DC)
 Voltage Rating : 30V

Physical Characteristics

Temperature Rating : 80°C

Supports

HDTV : 4K*2K 30Hz

Standards

UL : 20276
 Flame Retardant : VW-1
 RoHS3 Compliant : Yes